

Sumergible Trifásico



DIMENSIONES Y PESOS DE TRANSFORMADORES

CLASE 15 kV



13200YT/7620-220/127 V con o sin ITM

kVA	A(mm)	B(mm)	C(mm)	D(mm)	PESO (Kg)
75	1120	950	1420	760	1200
112.5	1240	960	1420	760	1235
150	1350	1050	1420	760	1400
225	1280	1050	1420	760	1600
300	1315	1050	1320	900	1920
500	1500	1300	1330	900	2500

CLASE 25 kV

22860YT/13200-220/127 V con o sin ITM

112.5	1250	1030	1410	765	1300
-------	------	------	------	-----	------

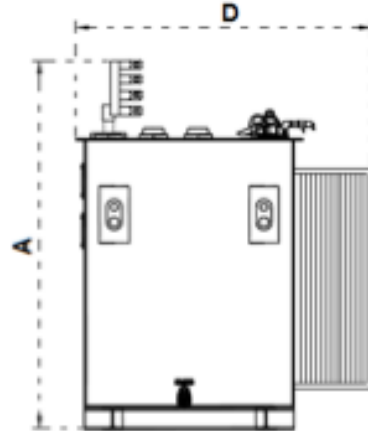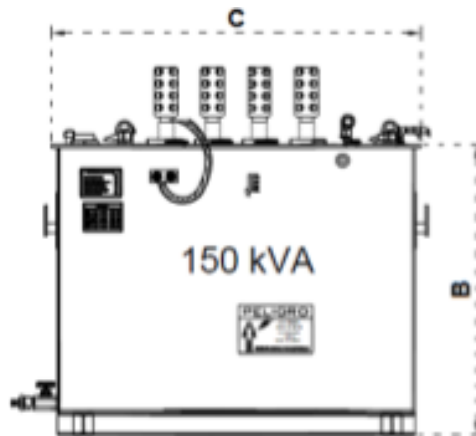

TRANSFORMADOR TIPO SUMERGIBLE TRIFÁSICO

NORMA K-0000-22 VIGENTE

CLASE 15 kV					CLASE 25 kV				CLASE 34.5 kV			
kVA	Pt	%Z	%η	%lex	Pt	%Z	%η	%lex	Pt	%Z	%η	%lex
75	692	2.00-3.00	98.86	1.00	759	2.00-3.25	98.75	1.00	827	2.00-3.50	98.64	1.00
112.5	955	2.00-3.00	98.95	1.00	1047	2.00-3.25	98.85	1.00	1130	2.00-3.50	98.76	1.00
150	1175	2.00-3.00	99.03	1.00	1286	2.00-3.25	98.94	1.00	1384	2.00-3.50	98.86	1.00
225	1708	2.50-5.00	99.06	1.00	1892	2.75-5.50	98.96	1.00	2057	3.00-5.75	98.87	1.00
NORMA K-0000-05												
300	2155	2.50-5.00	99.11	1.00	2375	2.75-5.50	99.02	1.00	2620	3.00-5.75	98.92	1.00
500	3226	2.50-5.00	99.20	1.00	3592	2.75-5.50	99.11	1.00	3918	3.00-5.75	99.03	1.00