


Pedestal Trifásico

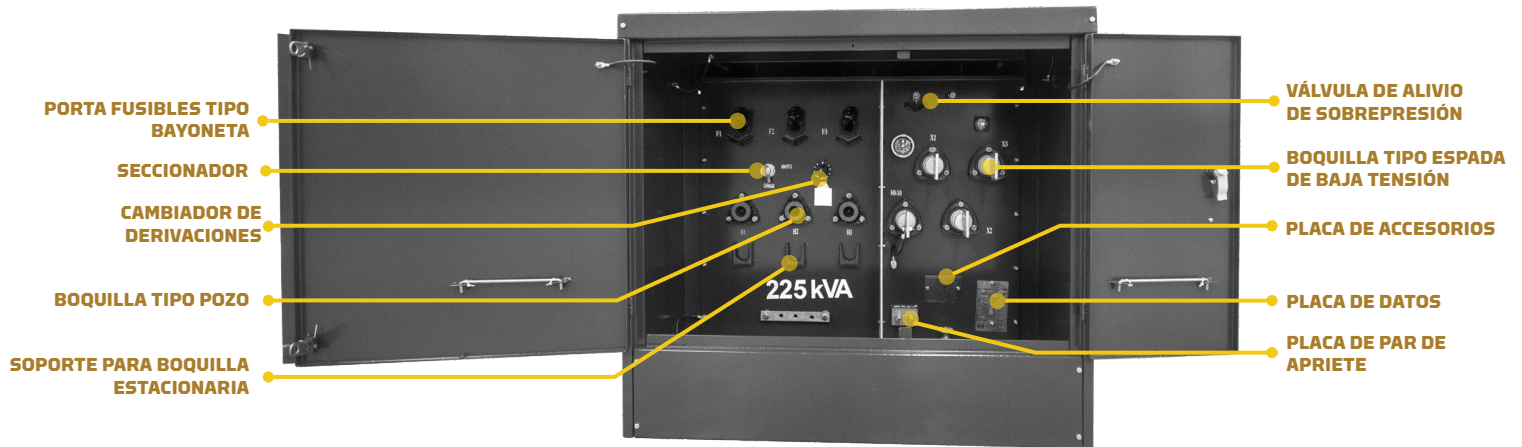


DIMENSIONES Y PESOS DE TRANSFORMADORES

CLASE 15 kV

13200YT/7620-220/127 V con o sin ITM

kVA	A(mm)	B(mm)	C(mm)	D(mm)	PESO (Kg)
75	1095	1060	1095	----	962
112.5	1260	1080	1160	----	1173
150	1260	1080	1160	1275	1297
225	1510	1090	1205	1370	1576
300	1670	1400	1295	1425	1781
500	1720	1505	1305	1700	1935

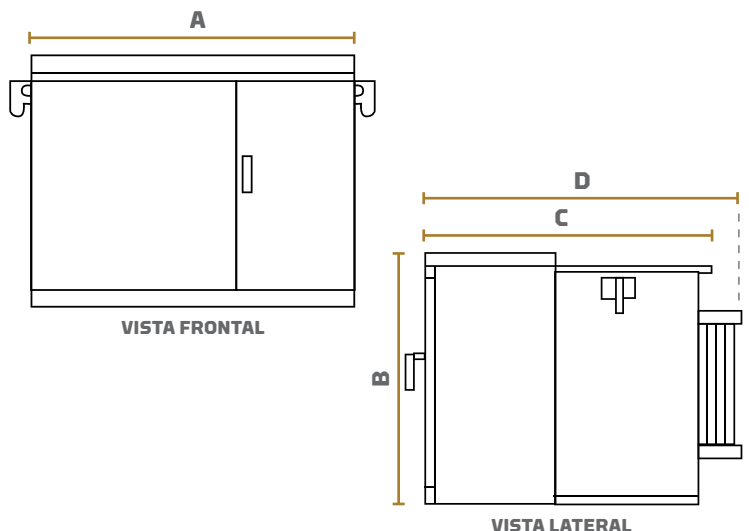

TRANSFORMADOR TIPO PEDESTAL TRIFÁSICO

NORMA K-0000-08 VIGENTE

CLASE 15 kV					CLASE 25 kV				CLASE 34.5 kV			
kVA	Pt	%Z	%η	%lex	Pt	%Z	%η	%lex	Pt	%Z	%η	%lex
75	692	2.00-3.00	98.86	1.00	759	2.00-3.25	98.75	1.00	827	2.00-3.50	98.64	1.00
112.5	955	2.00-3.00	98.95	1.00	1047	2.00-3.25	98.85	1.00	1130	2.00-3.50	98.76	1.00
150	1175	2.00-3.00	99.03	1.00	1286	2.00-3.25	98.94	1.00	1384	2.00-3.50	98.86	1.00
225	1708	2.50-5.00	99.06	1.00	1892	2.75-5.50	98.96	1.00	2057	3.00-5.75	98.87	1.00

NORMA K-0000-07 VIGENTE

300	2155	2.50-5.00	99.11	1.00	2375	2.75-5.50	99.02	1.00	2620	3.00-5.75	98.92	1.00
500	3226	2.50-5.00	99.20	1.00	3592	2.75-5.50	99.11	1.00	3918	3.00-5.75	99.03	1.00